

ISI Europa's MLSS Meter

MLSS Transmitter

Model : 7110MTF

- DC 4-20mA (MLSS)
- %, g/l, mg/l (ppm), NTU 가
- 2 line 14mm LED
- Outdoor enclosure IP 65
-

MLSS Sensor

Model : 7002 SWMF-T

- 0 ~ 6,000 ppm, 0 ~ 6 g/l NS
(NS:normal activated sludge)
- 90°-scattered-light with pulsed infrared light,
wavelength 880 nm
- Wiper
- 0 ~ 50 °C, Max 6 bar



ISI Europa's MLSS Meter

(1)

Display 전면부



ISI Europa's MLSS Meter




(2)



ISI Europa's MLSS Meter



(3)

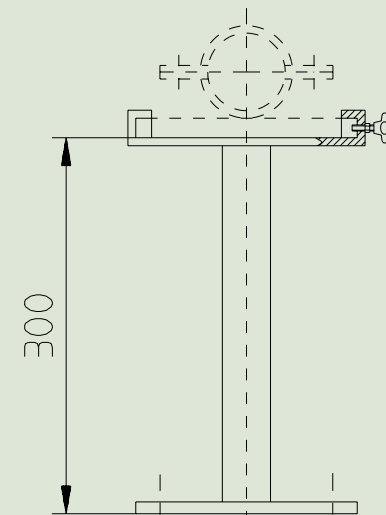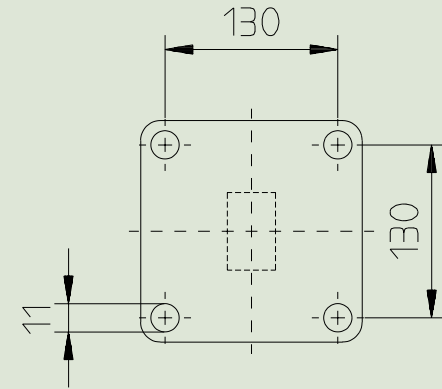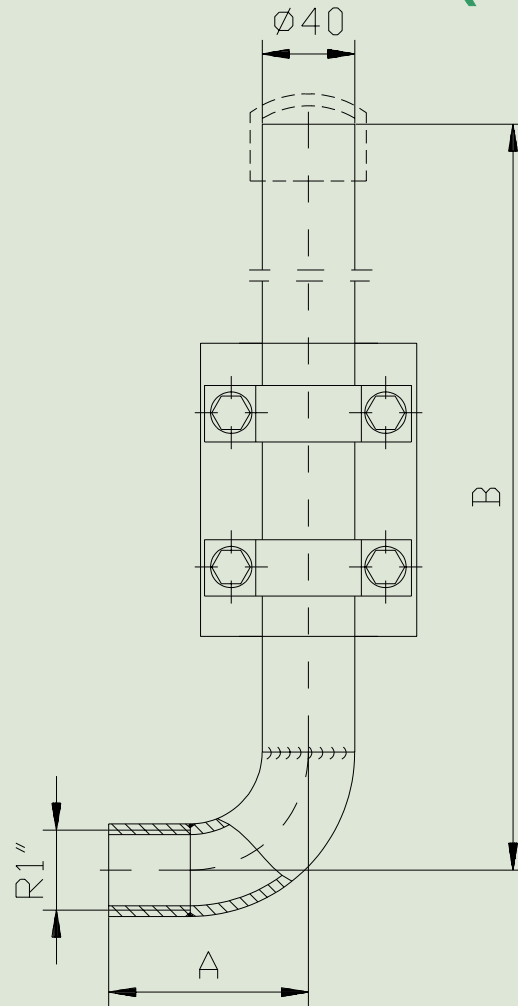

ISI Europa's MLSS Meter

(4)



ISI Europa's MLSS Meter

(5)

