

HF Resistant Flat-Surface & Self-Cleaning pH Combination Electrodes



Specifications (Model : S354CDHF)

| | |
|------------------------------|--------------------|
| Wetted Materials | Epoxy, porous HDPE |
| Range of Measurements | 0-14 pH |
| Pressure Maximum | 5 bar |
| Temperature Range | 0 - 80 Deg (Max) |
| Speed of Response | 95% in 5 seconds |
| Maximum Suggested HF% | 2% v/v |

Resist attack and etching from HF (up to 2% v/v)

Resist coating and fouling

Compatible with any pH meter

The specification sheet serves as an addendum to the pH industrial and covers all pH electrodes suitable for use in hydrofluoric acid.

Specifications differences for use in hydrofluoric acid (HF) are shown in SPECIFICATIONS section below. Please note 2 major differences as compared to standard electrodes. First, pH range is 0-14. Second, the temperature range is 0-80 (Max) deg C.

This series of electrodes are compatible with any portable - pH meter. Calibration of these electrodes is as normal with any standard pH electrode using standard pH buffer solutions.

Ordering Information


The HF models of these electrodes are available for our in-line, submersion and insertion (wet tap) models as follows:

Sensors


| | |
|------------------|---|
| S350CDHF | Epoxy body, 150mmL x 12mm OD, 30 in cable |
| S353CDHF | Flat surface KYNAR submersion pH electrode |
| S354CDHF | Flat surface CPVC submersion pH electrode with protective tip |
| S450CDHF | Flat surface CPVC side stream pH electrode |
| EXT Cable DIN-EL | Ext cable for models with DIN cap (S353CDHF, S354CDHF) |

HF Resistant pH Combination Electrodes


S350CDHF

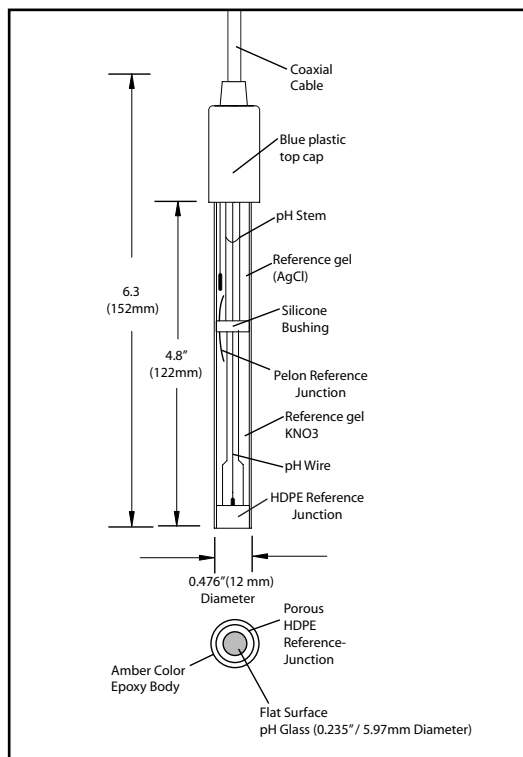


S450CDHF

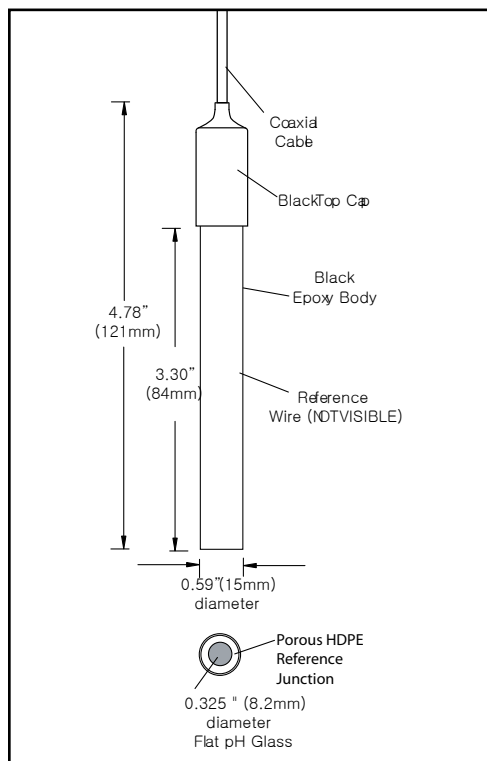

S354CDHF

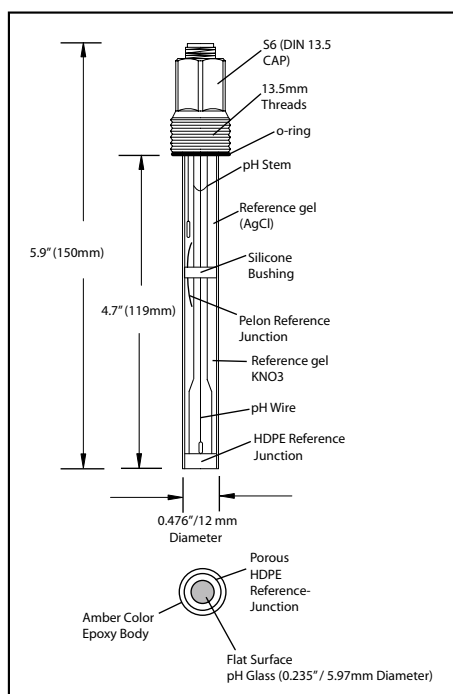

S353CDHF

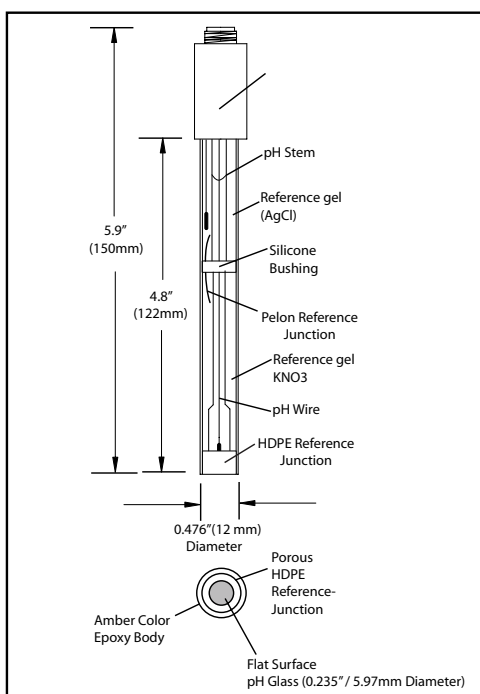


 11751 Markon Dr.
 Garden Grove, CA 92841 USA
 Tel: 714-895-4344
 Fax: 714-894-4839
 E-mail: info@sensorex.com
www.sensorex.com