

# Model: MX09F-1SD



1/4" Oval gear flow meter designed for the measurement of Fuels and Oils.

- Aluminium construction
- Viton® (FKM) seals
- Max flow rate 500 LPH / 132 GPH
- Temperatures up to 80°C
- Accuracy +/- 0.5% (0.25% available)
- Available with BSP(Rp) or NPT process connections

### Select a Flowmeter

#### Step 1.Size

09 (1/4")

#### Step 2.Family

F series - FUEL AND OIL

#### Step 3.Process Connection

1 - BSP (Rp)

#### Step 4.Rotor Type

S - Standard

#### Step 5.Pulser

D - 12mm LC Display

### Process Connection

Port Size	1/4"
Connection Type	BSP (Rp)

### Material of Construction

Body	Aluminium
Rotor	PPS
Bushing	No bushes
Seal	FKM (Viton®)

### Technical Specifications

Flow Range	<5cps	>5cps
	25 -500 LPH	15 -500 LPH
	6.6 - 132 GPH	4 - 132 GPH
Max Pressure	6895 kPa	1000 psi
Temperature	-20 - 60°C	-4 - 140°F
K-Factor	Refer to Flowmeter Data Plate	
Accuracy	+/- 0.5% (0.25% available with reduced range)	
Repeatability	+/- 0.03%	

### Service Kits

	Part Number	Description
Rotor Kit	MXS-09F-rotor	Rotor set and O-ring
Seal Kit	MXS-09F-seal	Meter Cap O-Ring - FKM (Viton®)

### Accessories

SS Y Strainer	YS800-01 (200 mesh 74 µm)
Air Eliminator/Strainer	N/A
Wall Mount Adaptor	MXA-06-WM
3 point cal check	MXA-3ptcal
Pressure test	MXA- PRESSTEST

# DIGITAL DISPLAY TYPE: D



## Type PR 12mm LC Display

The PR series is a meter mounted digital register with a 12mm LCD display, providing real-time indication of Flow rate, total and accumulated total.

### Construction

<b>Material</b>	Polypropylene	
<b>IP Rating</b>	67	
<b>Mounting</b>	Meter Mount	
<b>Connection</b>	M-Lock™	
<b>Cable Entry</b>	2x 12mm (blind)	
<b>Dimensions</b>	<b>Height (mm)</b>	<b>Diameter (mm)</b>
	48 mm	99 mm

### Technical Specifications

<b>Power Supply</b>	<b>Battery</b>	<b>External Pwr Supply</b>
	3V Lithium	-
<b>Backup</b>	EEPROM Flash memory	
<b>Outputs</b>	No	
	No	
	No	

### Service Kits


Part Number	Description
MXS-PCB-PR	PCB + Housing to suit display types D, E
MXS-DIS-PR	LCD unit to suit Display PR

### LC Display

Digital Size	Upper LCD	Lower LCD	
	7 digit / 12mm	7 digit / 7mm	
Display	Total	Acc Total	Flow Rate
	resettable	non-resettable	User defined units

# Dimensions

# MX09F-1SD

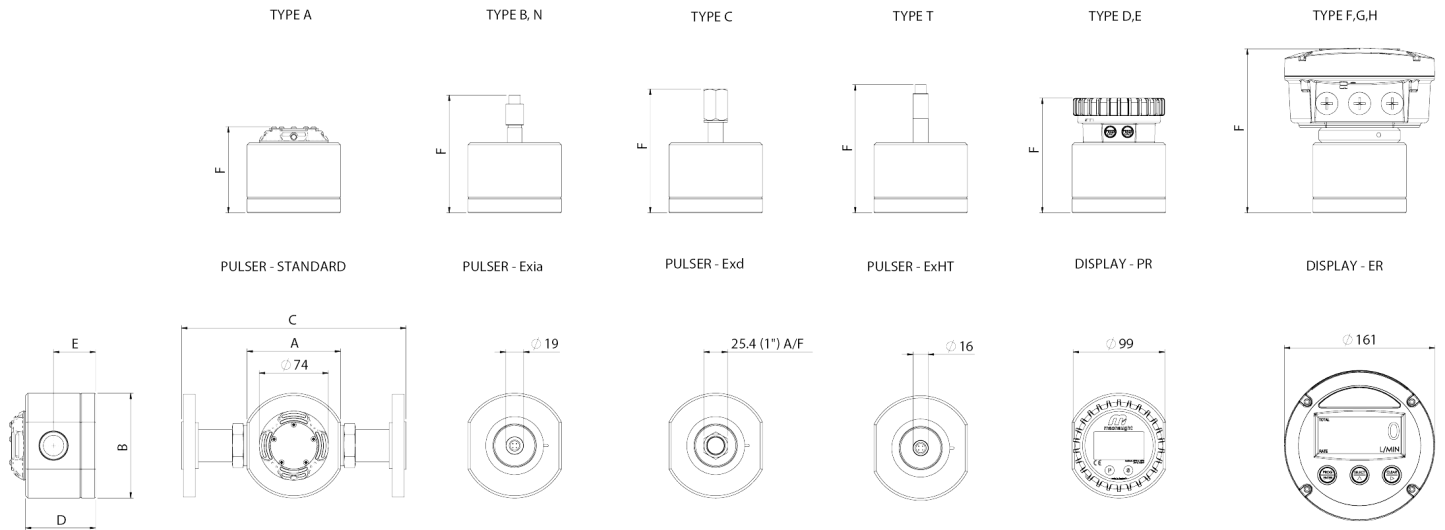

METER SIZE	PORT SIZE	METER AND FLANGE DIMENSIONS					PULSAR AND DISPLAY HEIGHT - F					
		A	B	C	D	E	TYPE A	TYPE B, N	TYPE C	TYPE T	TYPE D,E	TYPE F,G,H
MX06	1/4"	71	74	N/A	42	25	59	93	100	104	90	143
MX09	1/4"	71	74	N/A	42	24	59	93	100	104	90	143
MX12	1/2"	81	87	N/A	49	28	66	100	107	111	97	150
MX19	3/4"	100	112	N/A	62	37	79	113	120	124	110	163
MX25	1"	100	112	240	75	45	92	126	133	137	123	176
MX40	1 1/2"	120	137	240	103	61	120	154	161	165	151	204
MX50	2"	140	163	264	124	72	141	175	182	186	172	225