flow meters



Model: MX12F-1SD



1/2" Oval gear flow meter designed for the measurement of Fuels and Oils.

- Aluminium construction
- Viton® (FKM) seals
- Max flow rate 30 LPM / 8 GPM
- Temperatures up to 80°C
- Accuracy +/- 0.5% (0.25% available)
- Available with BSP(Rp) or NPT process connections

Select a Flowmeter	
--------------------	--

Technical Specifications

Step 1.Size	Flow Range	<5cps	>5cps		
12 (1/2")		3 - 25 LPM	2 - 30 LPM		
Step 2.Family		0.8 - 6.6 GPM	0.5 - 8 GPM		
F series - FUEL AND OIL	Max Pressure	13790 kPa	2000 psi		
Step 3.Process Connection	Temperature	-20 - 60°C	-4 - 140°F		
1 - BSP (Rp)	K-Factor	Refer to Flowmeter Data	a Plate		
Step 4.Rotor Type	Accuracy	+/- 0.5% (0.25% available with reduced range)			
S - Standard	Repeatability	+/- 0.03%			
Stop 5 Pulcar					

Step 5.Pulser

D - 12mm LC Display

Process Connection

Port Size	1/2"
Connection Type	BSP (Rp)

Material of Construction

Body	Aluminium
Rotor	PPS
Bushing	No bushes
Seal	FKM (Viton®)

Service Kits

	Part Number	Description
Rotor Kit	MXS-12F-rotor	Rotor set and O-ring
Seal Kit	MXS-12F-seal	Meter Cap O-Ring - FKM (Viton®)

Accessories

SS Y Strainer	YS012-01 (60 mesh 250 μm)
Air Eliminator/Strainer	N/A
Wall Mount Adaptor	MXA-12-WM
3 point cal check	MXA-3ptcal
Pressure test	MXA- PRESSTEST



macnaught.com.au

Digital Display



DIGITAL DISPLAY TYPE: D

Type PR 12mm LC Display

The PR series is a meter mounted digital register with a 12mm LCD display, providing real-time indication of Flow rate, total and accumulated total.

Construction

Material	Polypropylene	
IP Rating	67	
Mounting	Meter Mount	
Connection	M-Lock ™	
Cable Entry	2x 12mm (blind)	
Dimensions	Height (mm)	Diameter (mm)
	48 mm	99 mm

CF

 \mathbf{n}

macnaught

Technical Specifications

Power Supply	Battery	External Pwr Supply
	3V Lithium	-
Backup	EEPROM Flash memory	
Outputs	No	
	No	
	No	

Service Kits

Part Number	Description
MXS-PCB-PR	PCB + Housing to suit display types D, E
MXS-DIS-PR	LCD unit to suit Disply PR

LC Display

Digital Size	Upper LCD	Lower LCD	
	7 digit / 12mm	7 digit / 7mm	
Display	Total	Acc Total	Flow Rate
	resettable	non-resettable	User defined units



macnaught.com.au


macnaught

MX12F-1SD

Dimensions

- E -

D

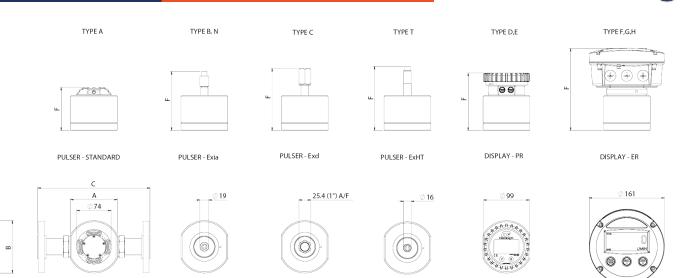

	METER AND FLANGE DIMENSIONS					PULSAR AND DISPLAY HEIGHT - F						
METER SIZE	PORT SIZE	Α	В	С	D	E	TYPE A	TYPE B, N	TYPE C	TYPE T	TYPE D,E	TYPE F,G,H
MX06	1/4"	71	74	N/A	42	25	59	93	100	104	90	143
MX09	1/4"	71	74	N/A	42	24	59	93	100	104	90	143
MX12	1/2"	81	87	N/A	49	28	66	100	107	111	97	150
MX19	3/4"	100	112	N/A	62	37	79	113	120	124	110	163
MX25	1"	100	112	240	75	45	92	126	133	137	123	176
MX40	1 1/2"	120	137	240	103	61	120	154	161	165	151	204
MX50	2"	140	163	264	124	72	141	175	182	186	172	225



macnaught.com.au