

VELOCICALC® Plus

Multi-Parameter Ventilation Meters

Models 8384, 8385, 8386


TSI's VELOCICALC® Plus Meters simultaneously measure and data log several ventilation parameters using a single probe with multiple sensors. Based on the model, these hand-held instruments measure velocity, temperature, differential pressure and humidity. All versions calculate volumetric flowrate. The Model 8386 also performs dew point, wet bulb temperature and heat flow calculations.

Data Logging Capabilities


- Data logging ability allows user to log 1394 samples with a time and date stamp
- Simultaneously records all parameters available in each model
- Single point and continuous data logging modes to fit your application
- Data can be reviewed on-screen, printed or downloaded to a computer spreadsheet program
- TSI downloading software permits easy transfer of data to a computer
- Statistics function displays average, maximum and minimum values, and the number of recorded samples

Features and Benefits

- Wide velocity range of 0 to 50 m/s
- Flowrate feature makes simple calculations of volumetric flowrate when the user inputs the duct shape and size, K factor or horn size
- Velocity measurements are made from the thermal sensor or a Pitot tube
- Automatic conversion between actual and standard velocity readings
- Direct calculation of dew point and wet bulb temperature - no psychrometric chart needed (Model 8386 only)
- Heat flow function calculates heat transferred after a heating or cooling element (Model 8386 only)
- Stable digital display when measuring fluctuating flows
- Back-lit display is easy to read in poor lighting conditions
- 101.6 cm telescoping probe with etched length marks to make duct traverse measurements easier
- Optional articulating probe available
- Optional portable printer provides hard copy documentation of your measurements

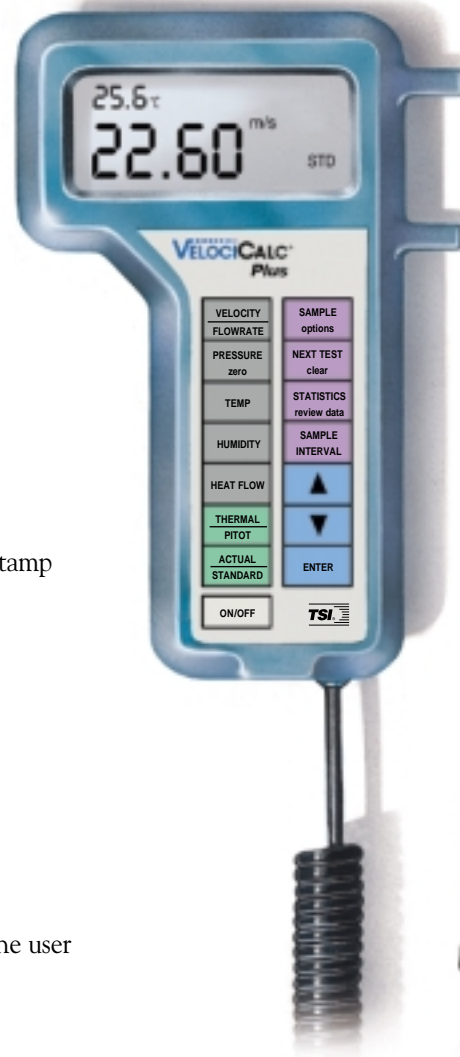

Model 8386



VELOCICALC PLUS Specifications—Models 8384(A), 8385(A) and 8386(A)**

Velocity From Thermal Sensor (all models):

Range: 0 to 50 m/s (0 to 9,999 ft/min)
 Accuracy^{1&2}: $\pm 3.0\%$ of reading or $\pm .015$ m/s (± 3 ft/min), whichever is greater
 Resolution: 0.01 m/s (1 ft/min)

Velocity From a Pitot Tube (Models 8385(A) and 8386(A)):

Range³: 1.27 to 78.7 m/s (250 to 15,500 ft/min)
 Accuracy⁴: $\pm 1.5\%$ at 10.16 m/s (2,000 ft/min)
 Resolution: 0.01 m/s (1 ft/min)

Volumetric Flowrate (all models):

Range: Actual range is a function of maximum velocity, pressure, duct size, and K factor

Duct Size (all models):

Range: 1 to 635 cm in increments of 0.1 cm
 (1 to 250 in. in increments of 0.1 in.)

Static/Differential Pressure (Models 8385(A) and 8386(A)):

Range⁵: -9.3 to +28.0 mmHg, or -1245 to +3735 Pa
 (-5 to +15 in. H₂O)
 Accuracy⁶: $\pm 1\%$ of reading, ± 1 Pa or ± 0.01 mmHg
 (± 0.005 in. H₂O)
 $\pm 0.03\%/^{\circ}\text{C}$ ($\pm 0.02\%/^{\circ}\text{F}$)
 Resolution: 1 Pa, 0.01 mmHg (0.001 in. H₂O)

Instrument Temperature Range:

Operating (Probe-8384 (A) and 8385 (A)):
 -17.8 to 93.3°C (0 to 200°F)
 Operating (Probe-8386 (A)):
 -10 to 60°C (14 to 140°F)
 Operating (Electronics):
 5 to 45°C (40 to 113°F)
 Storage:
 -20 to 60°C (-4 to 140°F)
 Resolution:
 0.1°C (0.1°F)
 Accuracy⁷: $\pm 0.3^{\circ}\text{C}$ ($\pm 0.5^{\circ}\text{F}$)

Relative Humidity (Model 8386(A) only):

Range: 0 to 95% rh
 Accuracy⁸: $\pm 3\%$ rh
 Resolution: 0.1% rh

Wet Bulb Temperature (Model 8386(A)):

Range: 5 to 60°C (40 to 140°F)
 Resolution: 0.1°C (0.1°F)

Dewpoint (Model 8386(A) only):

Range: -15 to 49°C (5 to 120°F)
 Resolution: 0.1°C (0.1°F)

Heat Flow (Model 8386(A) only):

Range: Function of Flow Rate, Temperature, Humidity and Barometric Pressure
 Measurements Available: Sensible Heat Flow, Latent Heat Flow, Total Heat Flow and Sensible Heat Factor
 Units Measured: BTU/h, kW

Logging Capability (all models):

Range: Up to 1394 samples and 275 test id's (one sample can contain up to all eleven measurement types)
 Intervals: 2 sec, 5 sec, 10 sec, 15 sec, 20 sec, 30 sec, 60 sec, 2 min, 5 min, 10 min, 15 min, 20 min, 30 min, 60 min

Time Constant (all models):

Intervals: 1 sec, 2 sec, 5 sec, 10 sec, 15 sec, 20 sec

External Meter Dimensions (all models):

Size Measurements: 10.7 cm \times 18.3 cm \times 3.8 cm (4.2 in. \times 7.2 in. \times 1.5 in.)

Meter Probe Dimensions (all models):

Probe Length: 101.6 cm (40 in.)
 Probe Diameter of Tip: 7.01 mm (0.276 in.)
 Probe Diameter of Base: 10.03 mm (0.395 in.)

Articulating Probe Dimensions (Models 8384A, 8385A, 8386A):

Articulating Section Length: 16.26 cm (6.4 in.)
 Diameter of Articulating Knuckle: 9.44 mm (0.372 in.)

Meter Weight Dimensions (all models):

Weight (with batteries): 0.54 kg (1.2 lbs)

Power (all models):

Requirements: Four AA-size batteries (included) or AC adapter (optional)

** Where 83XX(A) is listed, the specifications apply to both the 83XX (straight probe) and 83XX A (articulating probe) models.

1 Temperature compensated over an air temperature range of 5 to 65°C (40 to 150°F)

2 The accuracy statement of $\pm 3.0\%$ of reading or ± 0.015 m/s (± 3 ft/min), whichever is greater, begins at 30 ft/min through 9,999 ft/min.

3 Pressure velocity measurements are not recommended below 1,000 ft/min and are best suited to velocities over 2,000 ft/min. Range can vary depending on barometric pressure.

4 Accuracy is a function of converting pressure to velocity. Conversion accuracy improves when actual pressure values increase.

5 Overpressure range = 520 mmHg, 69 kPa (275 in H₂O)

6 Accuracy with instrument case at 25°C (77°F), add uncertainty of 0.03%/°C (0.02 %/°F) for change in instrument temperature.

7 Accuracy with instrument case at 25°C (77°F), add uncertainty of 0.03%/°C (0.05%/°F) for change in instrument temperature.

8 Accuracy with probe at 25°C (77°F). Add uncertainty of 0.2%RH/°C (0.1%RH/°F) for change in probe temperature. Includes 1% hysteresis.

Specifications are subject to change without notice.



TSI Incorporated Environmental Measurements and Controls Division

500 Cardigan Road
 Shoreview, MN 55126 USA
 Telephone: 800 777 8356
 651 490 2711
 Fax: 651 490 2874
 E-mail: emco@tsi.com
 Website: www.tsi.com

Europe:

TSI AB:
 Telephone: 46 18 527000
 TSI GmbH
 Telephone: 49 241 523030

	8384	8385	8386
Velocity	●	●	●
Volumetric Flowrate	●	●	●
Temperature	●	●	●
Differential Pressure		●	●
Thermal/Pitot		●	●
Humidity			●
Dew Point			●
Wet Bulb Temperature			●
Heat Flow Calculations			●
Data Logging/Downloading	●	●	●
Statistics/Review Data	●	●	●
Density Correction Factor	●	●	●
Variable Time Constant	●	●	●
Printer Output	●	●	●
NIST* Calibration Certificate	●	●	●

All models are available with either a straight or articulating probe.