

Anemometer

LM – 81AM



SECHANG INSTRUMENTS

1. Introduction

- **LM-81AM** 가 , .
- 가 .
- 가 .
- 가 .
- **LM-81AM** .
- , .
- .
- **HOLD** .

2. Specifications

2.1. General Specifications

사용온도	0℃ ~ 50℃, 80% RH 이하
화면표시	8mm 디지털 LCD
측정범위 Over	“-----” 표시
전원공급	006P DC 9V 건전지
크기	본체 : 60(W) × 156(H) × 33(D) mm
중량	약 160 g

2.2. Electrical Specifications(23 ± 5)

단위	범위	분해능	정밀도
m/sec	0.4 ~ 30.0	0.1	≤20 m/s: ±3% F.S. > 20 m/s: ±4% F.S.
KNOTS	0.8 ~ 58.3	0.1	
ft/min	80 ~ 5910	1	
MPH	0.9 ~ 67.0	0.1	
Km/hr	1.4 ~ 108	0.1	

Remark:

ft/min: Feet per minute


m/s: meters per second

km/h: kilometers per hour

MPH: miles per hour

Knots: nautical miles per hour

3. Specifications

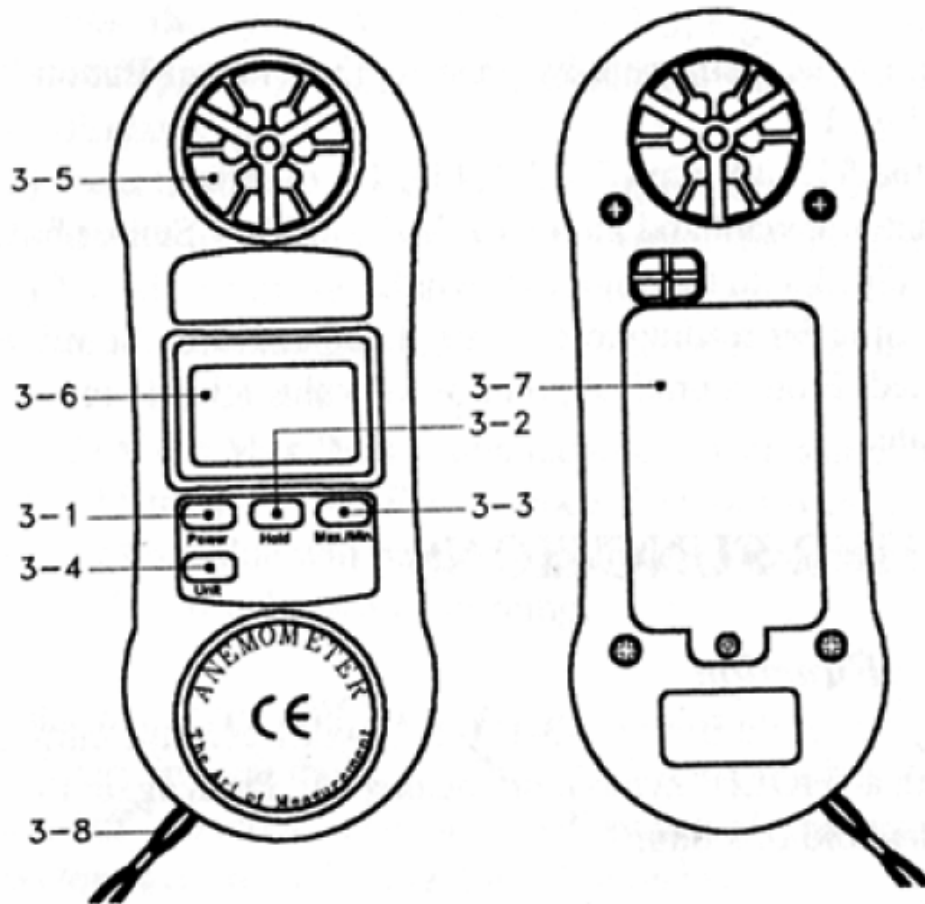

1.

3-1 Power

3-7

3-2 Hold

3-8

3-3 Max. / Min.

3-4 Unit

3-5 Air Flow Sensor

3-6 LCD

4. Measuring Procedure()

1. **Power** (3-1, 1) .
2. **Unit** (3-4, 1) ,
3. , .

NOTE: 가 , 가 .

NOTE: .

5. Other Functions()

5.1. HOLD

HOLD (3-2, 1) , **“HOLD”** 가 ,
HOLD ,

5.2. DATA Record

DATA Record ,
Max./Min. (3-3, 1) ,

“REC” 가 , DATA Record .

“REC” 가 ,

1. **Max./Min.** (3-3, 1) , **“REC”** **“Max”** 가 , DATA Record .

2. **Max./Min.** (3-3, 1) , **“Max”** 가 **“Min”**

, DATA Record

3. **Max./Min.** (3-3, 1) 2 , DATA
Record .

NOTE: DATA Record


, **Max./Min.** (3-3, 1) , DATA
.

5.3. Auto Power Off ()

, *LM-81AM*
10
, *LM-81AM* .

6. Battery Replacement ()

1. *LM-81AM* LCD



LM-81AM

가 .

. 가 ,
3

2. (3-7, 1)


3. , .

4. (3-7, 1) .




모델 LM - 81AM

Anemometer



3 : 2004 2 2

:



,

,

.



() 152-766

3 235-2

1303

TEL : 02-6220-7200 (), FAX : 02-6220-7250 ()

ID :



e-mail : sechang@sechang.com

Internet Website : <http://www.sechang.com>



SECHANG INSTRUMENTS